

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

1. **EMULATION START-UP.** After a connection to the Nonclassified Internet Protocol Routing Network (NIPRNET) has been made, double-click the icon used for Telnet, and select a session the points to one of the following addresses:

207.133.1.82 **-or-** 207.133.1.83

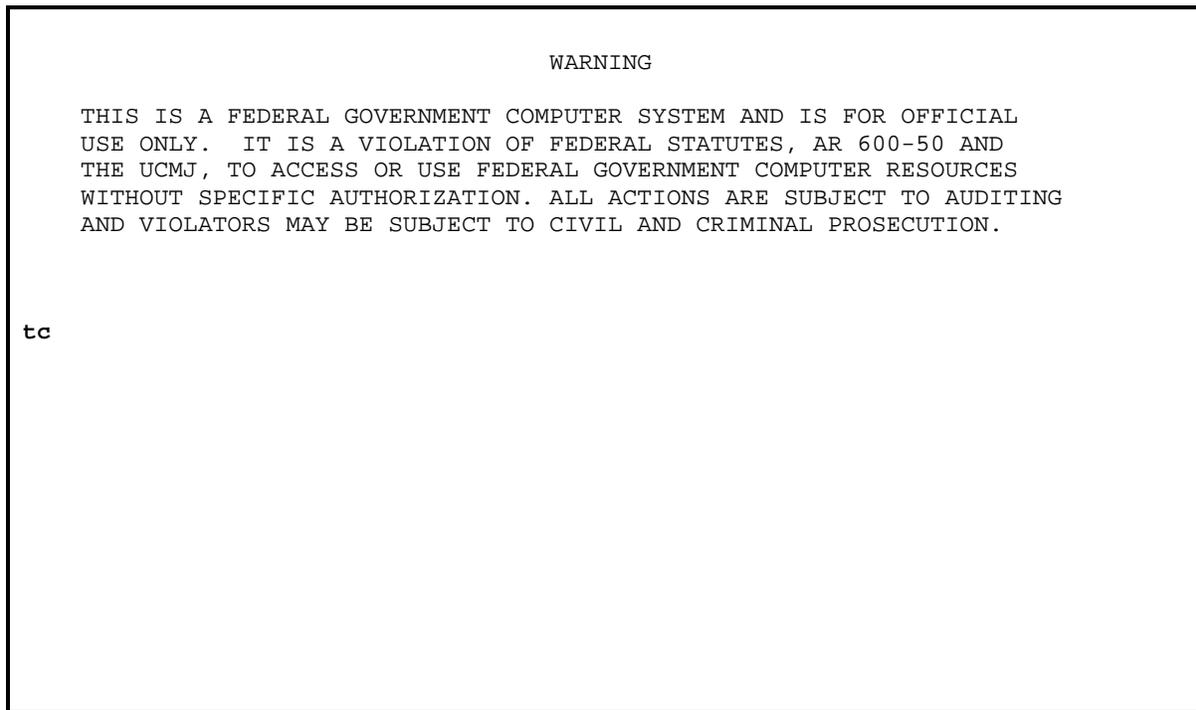


Figure 1 – Federal Government Warning Screen

2. **FEDERAL GOVERNMENT WARNING SCREEN.** The cursor should be blinking on the left side of this screen. To continue signing on to the mainframe, type “tc”, and press <Enter>. This screen is not case sensitive.

**ACCESSING THE ACTIVE READINESS INFORMATION
SYSTEM (ARIS) USING CL/SUPERSESSION**

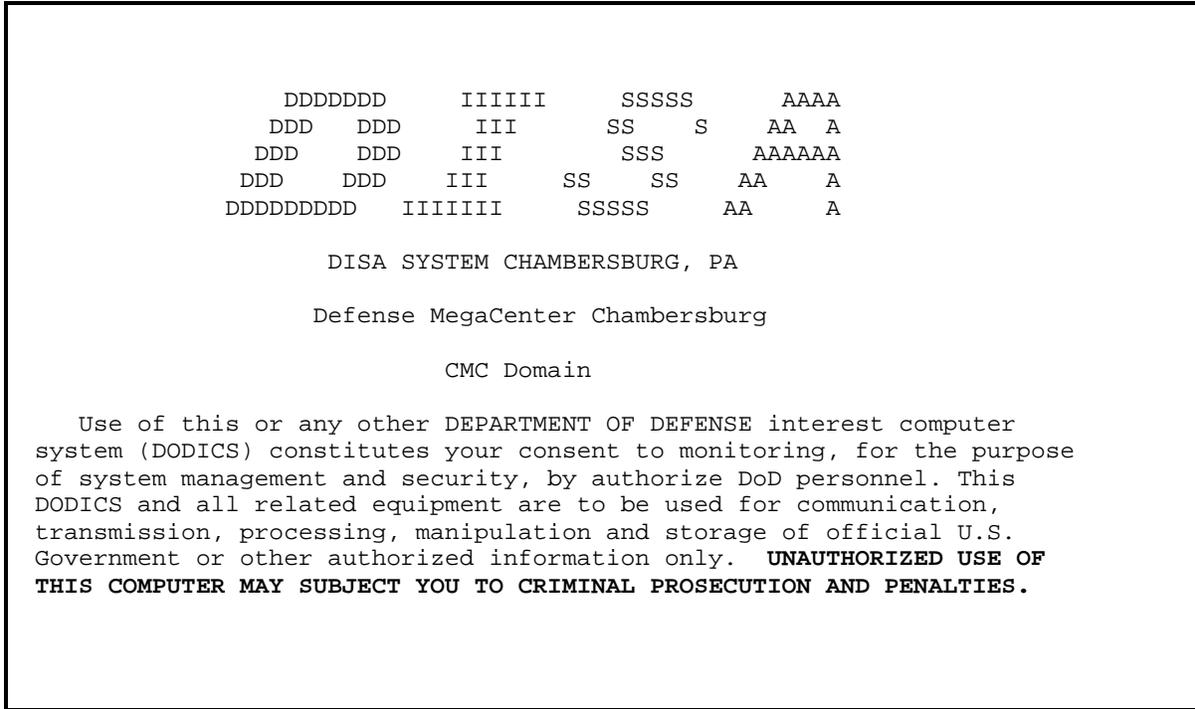


Figure 2 – DISA Warning Screen

3. DEFENSE INFORMATION SYSTEMS AGENCY (DISA) WARNING SCREEN. To continue signing on to the Active Readiness Information System (ARIS), press <Enter>.

**ACCESSING THE ACTIVE READINESS INFORMATION
SYSTEM (ARIS) USING CL/SUPERSESSION**

```
KLGLGON1 -----          Entry Validation          -----
Date: 08/12/98                                     System: MC27
Time: 11:39:10                                     Device: TCC002DB

      Identification:
      Userid..... e1a9999_
      Password..... _____      Change Password ?  N (Y or N)

      Additional Information:
      Group..... _____
      Acct..... _____
      Proc..... _____

Bulletins:

                        Copyright 1987-1993
                        an unpublished work by
      Candle Corporation. All rights reserved.
                        Use permissible by License only.

ENTER USERID
Enter  F1=Help  F3=Exit
```

Figure 3 – Entry Validation Screen

4. ENTRY VALIDATION SCREEN. To sign onto CL/Supersession’s Session Manager, type your ARIS UserID, press <Tab>, type your password, then press <Enter>. UserIDs and passwords are not case sensitive.

Password Change Function - While signing on from this screen, you have the option to change your password. If you want to change it, <Tab> the cursor to the “N” following “Change Password?” and replace it with a “Y” prior to pressing <Enter>.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

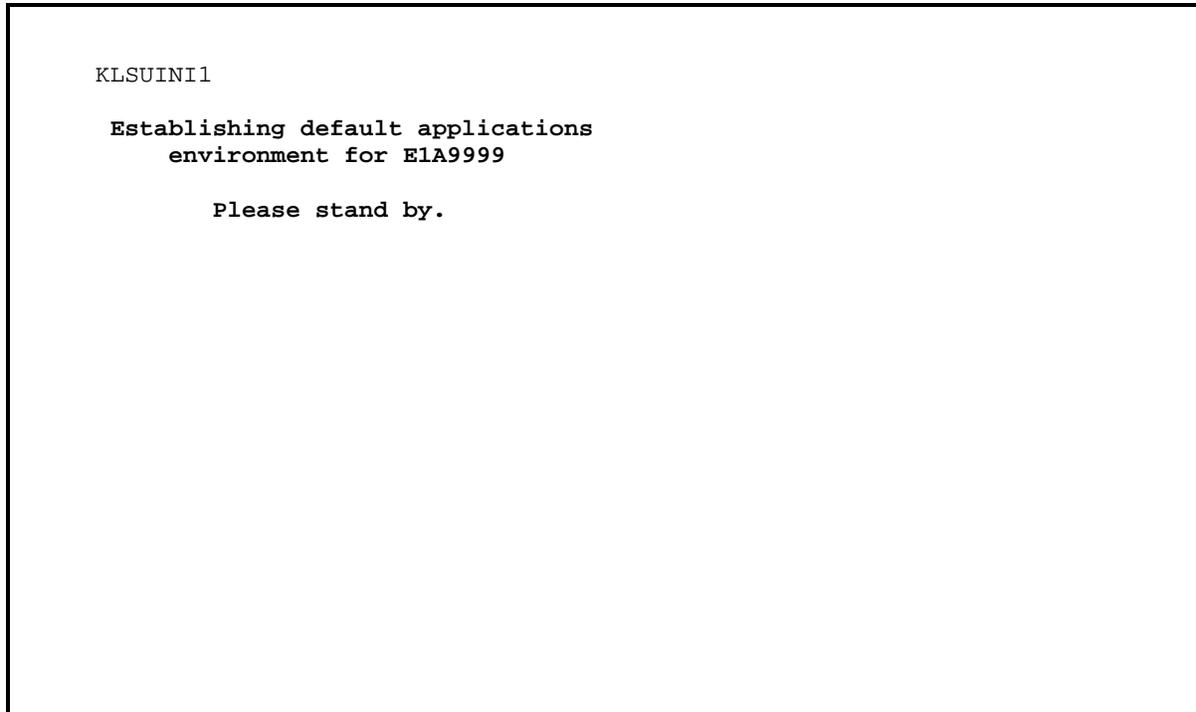


Figure 4 – Establishing Default Applications Screen

5. ESTABLISHING DEFAULT APPLICATIONS SCREEN. By searching through a database, CL/Supersession makes a determination on which sessions are to be displayed on the main menu. This may take a few seconds depending on computer response time. Once CL/Supersession is finished with this process, the main menu will be displayed.

**ACCESSING THE ACTIVE READINESS INFORMATION
SYSTEM (ARIS) USING CL/SUPERSESSION**

```

_____  Actions  Options  Commands  Features  Help
-----
KLSVSEL1                CL/SUPERSESSION Main Menu                More:  +

Select sessions with a "/" or an action code.

      Session ID  Description                                Type      Status
      -----
s ACNCIP23      P2 DOMAIN - NAVY PROD ARIS CI      Multi
_  ACNCIP17      P2 DOMAIN - NAVY PROD EAIS CI      Multi
_  ACNCIP01      P2 DOMAIN - CLEV PROD CICS RG      Multi

ACF01137 E1A9999 LAST SYSTEM ACCESS 13.38-08/06/98 FROM TCC00360
Command ==> _____ MC27/TCC002DB
Enter  F1=Help  F3=Exit  F5=Refresh  F8=Fwd  F9=Retrieve  F10=Action

```

Figure 5 – CL/Supersession Main Menu Screen

6. MAIN MENU SCREEN. Figure 5 shows an example of a CL/Supersession Main Menu Screen. You may or may not have the same session(s) displayed. Sign on to the ARIS session by: <Tab> cursor to the ARIS session (ACNCIP23), type “S” to select it, and press <Enter>. If necessary, you may have to sign onto ARIS by typing your UserID, <Tab> to password, type your password, and press <Enter>.

NOTE: Be careful not to press “D” when selecting a session. D is the action code for deleting a menu item. If “D” is used by accident, you will be given one chance to cancel the action. If the session has been deleted, follow instructions for “Adding A Session” found on page 10 of this guide.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

```

_____  Actions  Options  Commands  Features  Help
-----
KLSVSEL1                CL/SUPERSESSION Main Menu                More:  +

Select sessions with a "/" or an action code.

   Session ID  Description                                Type      Status
   -----
-  ACNCIP23    P2 DOMAIN - NAVY PROD ARIS CI      Multi     Current
-  ACNCIP17    P2 DOMAIN - NAVY PROD EAIS CI      Multi
-  ACNCIP01    P2 DOMAIN - CLEV PROD CICS RG      Multi

Command ==>
Enter  F1=Help  F3=Exit  F5=Refresh  F8=Fwd  F9=Retrieve  F10=Action
MC27/TCC02990

```

Figure 6 – Main Menu Screen with a Session (ARIS) Running

7. WORKING WITHIN CL/SUPERSESSION’S SESSION MANAGER. If you have two or more sessions listed on your CL/Supersession Main Menu, you can toggle between them. Figure 6 shows the status of the ARIS session as current (active). Using three function keys with <Shift> depressed will enable you to “Jump” from one active session to another. Note: Active sessions will have “current” or “active” displayed under the status column.

- <Shift> <F10> Jumps from current session to CL/Supersession’s Main Menu.
- <Shift> <F11> Jumps from current session to the next active session above it on the Main Menu screen. **(Only if two or more sessions are listed on the menu.)**
- <Shift> <F12> Jumps from current session to the next active session below it on the Main Menu screen. **(Only if two or more sessions are listed on the menu.)**

Follow the instructions below for running two or more sessions concurrently.

- a. Sign on to first session by: <Tab> cursor to desired session, type “S” to select it, and press <Enter>. If necessary sign onto the session by typing your UserID, <Tab> to password, type your password, and press <Enter>.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

- b. Jump back to the CL/Supersession Main Menu by pressing and holding <Shift> and pressing <F10>.
- c. Sign on to second application session by: <Tab> cursor to desired session, type “S” to select it, and press <Enter>. If necessary sign onto the session by typing your UserID, <Tab> to password, type your password, and press <Enter>.
- d. At any time while signed on to one session, more sessions can be added by repeating steps b and c.

```
_____ Actions Options Commands Features Help
-----
KLSVSEL1          CL/SUPERSESSION Main Menu          More:  +
Select sessions with a "/" or an action code.

  Session ID  Description                                Type      Status
  -----
- ACNCIP23    P2 DOMAIN - NAVY PROD ARIS CI      Multi     Current
- ACNCIP17    P2 DOMAIN - NAVY PROD EAIS CI      Multi
- ACNCIP01    P2 DOMAIN - CLEV PROD CICS RG      Multi

Command ==> lock                                     MC27/TCC02990
Enter  F1=Help  F3=Exit  F5=Refresh  F8=Fwd  F9=Retrieve  F10=Action
```

Figure 7 – Lock Feature on Main Menu Screen

8. LOCK FEATURE. A security feature is available in CL/Supersession if you have to leave your microcomputer unattended for any reason. Use step b in paragraph 7 to get to the main menu, Press <Tab> to the “Command ==>” prompt at the bottom of the screen, type “lock”, and press <Enter>.

Note: This should be done in **addition** to using a password protected Windows screen saver.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

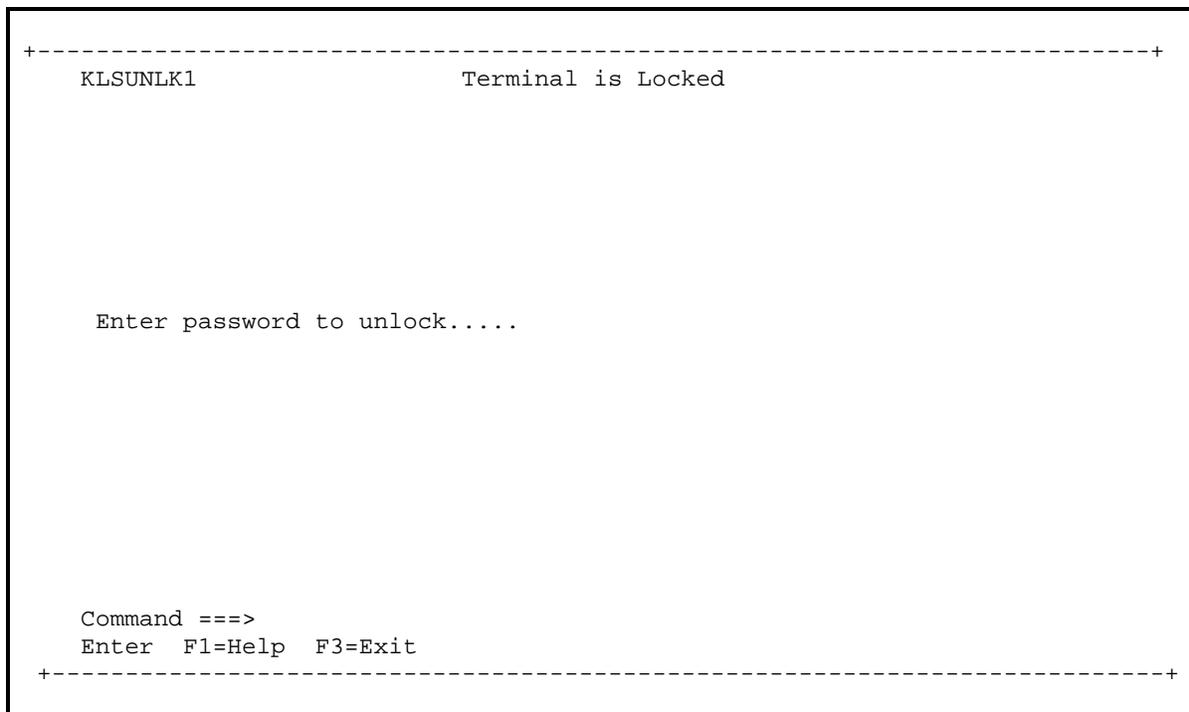


Figure 8 – Lock Screen

9. UNLOCKING THE LOCK SCREEN. Once at the lock screen, the only way to continue the session(s) you started is to know your password. Type your password, and press <Enter>. You will be taken back to the main menu.

NOTE: CL/Supersession has a time-out feature that causes this screen to be displayed after 15 minutes of inactivity.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

```

_____  Actions  Options  Commands  Features  Help
-----
KLSVSEL1          CL/SUPERSESSION Main Menu          More:  +

Select sessions with a "/" or an action code.

  Session ID  Description                               Type  Status
  -----
_ ACNCIP23    P2 DOMAIN - NAVY PROD ARIS CI  Multi
_ ACNCIP17    P2 DOMAIN - NAVY PROD EAIS CI  Multi
  Multi

KLSEXIT1          Exit Menu

Type a selection number or position the
cursor on a line and press ENTER.

_ 1. Exit (X)
  2. Resume (R)

Command ==>
Enter  F1=Help  F12=Cancel

                                          MC27/TCC002DB
                                          9=Retrieve  F10=Action

```

Figure 9 – Exit “Pop-Up” Menu

10. LOGGING OFF OF ARIS. Prior to exiting CL/Supersession, **you must first** sign off each running application. To exit the ARIS session, type LOGOFF at the top of the screen. **Note:** If while exiting ARIS the sign on screen is displayed, type “LOGOFF” in the place of your User ID and press <Enter>. The CL/Supersession Main Menu will then be displayed.

11. EXITING CL/SUPERSESSION. To exit CL/Supersession, sign out of each individual session that you were logged into. Press <F3> from the main menu and CL/Supersession’s Exit Menu “pops-up” (see figure 9). With the cursor in front of the Exit option, press <Enter>. Once the Government Warning Banner (see figure 1) is displayed, close the window to go back to the Windows Program Manager.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

```

_____  _A_ctions  _O_ptions  _C_ommands  _F_eatures  _H_elp
-----
KLSVSEL1          KLSCMD11          Command Selection Menu

Select sessions with      Select a command with the cursor, using TAB, then
                             press ENTER.

  Session ID  Descr
  -----
_ ACNCIP23    P2 DO
_ ACNCIP17    P2 DO

_ Add          Background  BEep          BOttom
  BULLETINS   Date          DElete       eXit
  Help        List         LOck         Msgid
  News        Panid        REOrder      Reset
  RETrieve    Start        Terminate    TIme
  TOp         Whoami

Command ==>
Enter F1=Help F12=Cancel

Command ==>
Enter F1=Help F3=Exit F5=Refresh F9=Retrieve F10=Action

MC12/TCC0383C

```

Figure 10 – Command Selection Menu Screen

12. ADDING A SESSION. If access to additional applications is provided to you, or if you accidentally delete a menu session, you will need to add the session to your CL/Supersession Main Menu Screen. To do this, follow the below procedures:

- a. <Tab> cursor up to the “**Commands**” option and press <Enter>. The Command Selection Menu should appear. <Tab> cursor to “**Add**” and press <Enter>.

ACCESSING THE ACTIVE READINESS INFORMATION SYSTEM (ARIS) USING CL/SUPERSESSION

```

_____  _A_ctions  _O_ptions  _C_ommands  _F_eatures  _H_elp
KLSV    _____  A_ctions  H_elp
Sele    KLSALST1      Add Sessions to Selection Menu      More:  +
S       Add sessions with a "/" or an action code.
-
_  A     Session ID  Description                                Type      Source
_  A     -----  -
_  ACNCIP23  P2 DOMAIN      - Navy Prod ARIS C  Multi     APPLDEF
_  ACNCIP17  P2 DOMAIN      - Navy Prod EAIS C  Multi     APPLDEF
a  ACNCIP01  P2 DOMAIN      - Clev Prod CICS R  Multi     APPLDEF

Command ==>
Enter  F1=Help  F8=Fwd  F12=Cancel

Command ==>
Enter  F1=Help  F3=Exit  F5=Refresh  F9=Retrieve  F10=Action
MC12/TCC0383C

```

Figure 11 – Add Sessions Menu Screen

b. <Tab> to the desired session, type “A” to add it, and press <Enter>. The screen will indicate that the session was added. Press <F12> to return to the CL/Supersession Main Menu Screen.

Contact us if you need further assistance

If you need assistance using CL/Supersession, contact your Terminal Area Security Officer (TASO), department Information Systems Security Officer (ISSO), or the Enlisted Placement Management Center’s (EPMAC), Information Security/Access Control Office (Code 40ITB) at commercial (504) 678-1672, DSN 678-1672, or email ep40itb@epmac.nola.navy.mil.

